

1650 E



www.ommelift.dk

TRAILER MOUNTED BOOM PLATFORM

OMMELIFT




Quality since 1906

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme
Phone: + 45 753 413 00 – Fax: + 45 753 415 92
E-mail: omme@ommelift.dk – Web: www.ommelift.dk

1650 E

Mounted on trailer

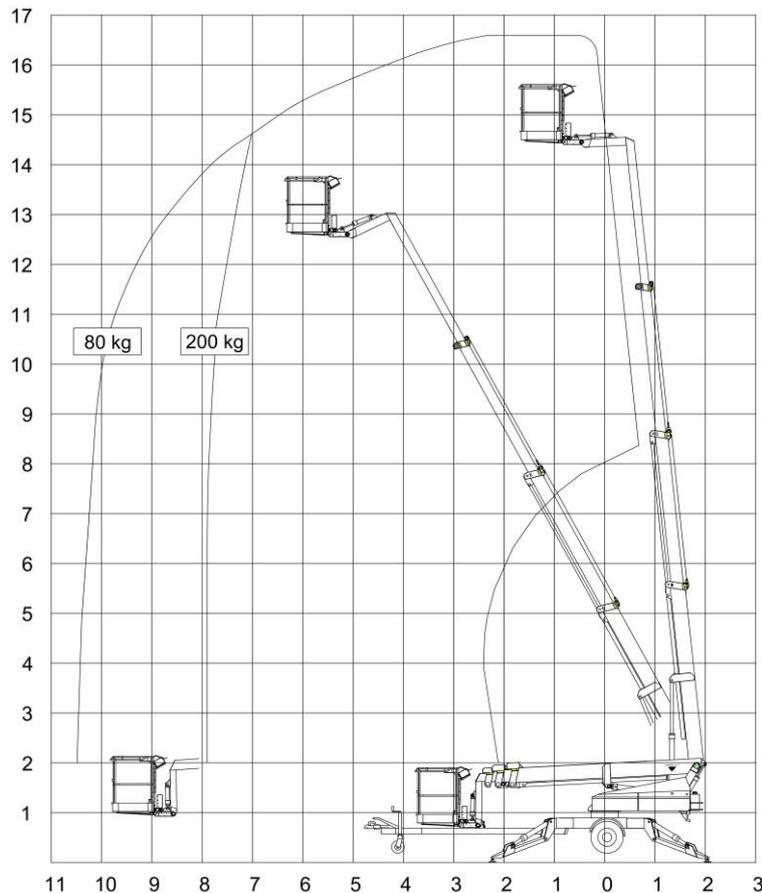

Technical data:	1650 E	1650 EB	1650 EBD
Max. working height	16.60 m		
Max. outreach	10.30 m		
Max. basket load	200 kg		
Basket size	1.25x0.8x1.1m		
Turnable basket	± 41°		
Rotation	± 400°		
Power supply	230V/16A	Battery	Battery/diesel
Batteries		24V/200Ah/5h	24V/200Ah/5h
Charger		24 V/30 A	24 V/30 A
Diesel engine			14kW/18.8hp
Generator			24V/22A
Transport length	6.75 m	6.75 m	7.04 m
Transport height	2.05 m		
Transport width	1.70 m		
Operational width	4.25 m		
Total weight	2080 kg	2200 kg	2360 kg
Controls	Proportional		
Hydraulic stabilizers	+		
Hydraulic propulsion	+		
230V outlet in basket	+		

+ Standard

NARROW PLACES



Angle boom



Propulsion



Easy control



Transport

- 1650E, 1650EB and 1650 EBD are identical apart from their power sources. Standard features include hydraulic stabilizers with interlocks, basket rotation and proportional controls with dual controls to ground and basket. Design features include a basket mounting that forms a "fly" boom mounted to the top boom section and gives increased outreach over obstacles. The specially designed steel booms made from high and broad profiles allow greater outreach whilst maintaining a high degree of stability and rigidity. Being shorter in travel length than most machines of this type, the 1650E-series allows improved manoeuvrability and is particularly suited when mounted on to a chassis cab.
- 1650E is mains powered 230 V/16 A and is especially suitable, where continuous or extended operation is required.
- 1650EB is powered by a heavy duty 24 V battery pack with built-in charger capable of charging the batteries whilst the platform is in use. 1650EB is especially suited for jobs, without mains access.